

# FILTERS S2 SIDE AND TOP

ROBUST AND FIABLE



Fine filtration  
microns  
40 - 50




Easy  
maintenance



Side and  
Top versions  
available

CLASSIC LINE  
2 YEARS OF WARRANTY



Drain with plug that also  
serves as a dismantling tool



Vari-Flo™ 6-way valve




NEW

- ➔ Robust: Its high-density polyethylene structure is weather-resistant and unaffected by water treatment products. Made of hard-wearing resin
- ➔ S2 sand filters provide very fine filtration of 40 to 50 microns
- ➔ Drain with plug used as a tool for dismantling the pump.
- ➔ Available in different sizes, ranging from 5 to 14 m<sup>3</sup>/h, side or top versions
- ➔ Anti-corrosion tank for use in all climates
- ➔ Patented system of retractable collector arms: the collector arms easily fold back thanks to their ingenious design, making maintenance of your sand filter easier

Ref.	Flow rate (m <sup>3</sup> /h)	Filtration area (m <sup>2</sup> )	Sand (kg)	I/O
<b>FILTERS S2 TOP</b>				
S2-350TOP	5	0.10	25	1"1/2
S2-400TOP	6	0.13	50	1"1/2
S2-500TOP	10	0.20	100	1"1/2
S2-600TOP	14	0.28	150	1"1/2
<b>FILTERS S2 SIDE</b>				
S2-500SIDE	10	0.20	100	1"1/2
S2-600SIDE	14	0.28	150	1"1/2

Technical Specifications	
Max. water temperature	40°C
Operating pressure	0.5 - 1.3 bar
Maximum pressure	3.5 bar
Connection	1.5"
Tank	Blown polyethylene, suitable for saltwater
Granulometry of filtration media	0.4 ÷ 0.8 mm

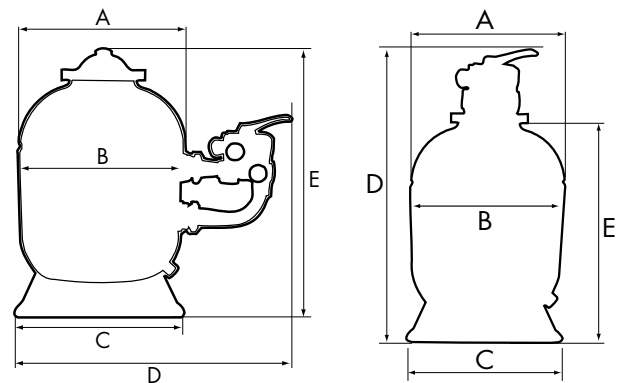

Dimensions	A	B	C	D	E
------------	---	---	---	---	---

FILTERS S2 TOP					
S2-350TOP	368 mm	358 mm	371 mm	805 mm	545 mm
S2-400TOP	401 mm	391 mm	371 mm	858 mm	598 mm
S2-500TOP	511 mm	500 mm	521 mm	989 mm	729 mm
S2-600TOP	612 mm	594 mm	521 mm	1097 mm	837 mm
FILTERS S2 SIDE					
S2-500SIDE	510 mm	498 mm	521 mm	825 mm	810 mm
S2-600SIDE	612 mm	594 mm	521 mm	875 mm	920 mm